



Oil-free Portable Compressors

NHP 1500



High performance, easy operation, and outstanding control

For more than 125 years, Ingersoll Rand has been the world leader in compressor technology. That tradition of leadership continues with our 1500 model oil-free compressor, built specifically for applications where quality air is a must, including petrochemical and nuclear facilities.

Carefully designed to meet your specific demands, the 1500 provides the power, fuel efficiency, and easy-to-operate features you need while meeting current and future emissions regulations. This high-performance compressor will help you get the most out of your long-term rental dollar.



Superior features add up to superior performance

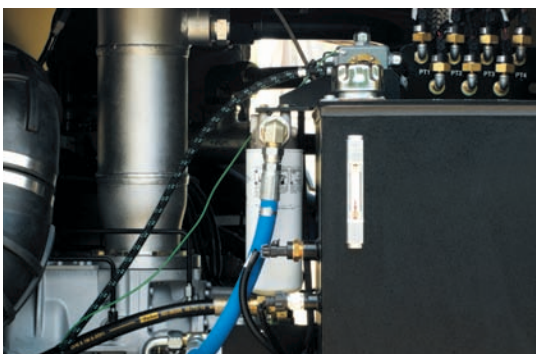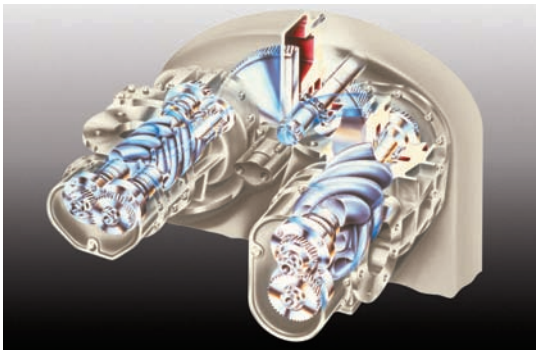

Reliable and durable design

To protect against impurities, the 1500 offers stainless steel interconnecting piping and a corrosion-resistant intercooler and aftercooler. The 1500 can also run at full load for at least 10 hours with the onboard fuel supply, which can easily be connected to an auxiliary fuel tank.

Maximum airoend efficiency

Extensively field-proven in industrial applications, our two-stage, oil-free airoend is the heart of the machine. Each set of rotors is precision-machined in a 20-step manufacturing process and has an UltraCoat™ finish that not only optimizes the rotor profile but resists corrosion. This is essential to minimizing air slippage and maintaining airoend efficiency.

Power in any climate

The 1500 has excellent ambient capabilities, performing in hot climates as well as in temperatures as low as -20° F. The cold-weather protection system gives you the improved response time needed before the machine comes up to temperature and can begin working.

Intelligent control

Our Intellisys® control system is a comprehensive operational, diagnostic, and safety interface. Known for its user-friendly features, this system is built into the 1500 and carefully structured to provide as much or as little information as necessary. It also allows compressor operating parameters to be fine-tuned quickly and easily.

Easy to maintain

The fluid systems on this compressor are conveniently located and make it easy to maintain fluid levels. Central drain systems are standard for easy servicing. In addition, an optional modem-based satellite communication system reduces service costs and helps with maintenance scheduling through shutdown warnings.

Continuous air delivery in an environment



Environmental

Continuous air delivery

With an operating pressure of 150 psi, our 1500 oil-free compressor provides exceptional application flexibility. It's capable of continuous 1,500 cfm (42.5 m³/min) free air delivery between 60 and 150 psi (4.1 and 10.3 bar), and works well in applications where constant volume is as important as correct pressure. Designed for optimal efficiency, the 1500 also eliminates the need to reduce flow as pressure requirements increase.

Environmental awareness

The 1500 features a sealed base designed to hold fluid spills, thus preventing potential on-site contamination. In addition, water precipitated from the air stream by the intercooler and aftercooler is collected and routed through our patented condensate burn-off system. This is a significant benefit if you're operating in humid conditions where condensate disposal can exceed one ton per day — as well as in cold conditions where condensate can freeze in temporary drainage systems.

- A Condensate burn-off system**
Our patented system collects water from the intercooler and aftercooler and injects it into engine exhaust for flash evaporation. It also eliminates the need for conventional condensate drainage systems with cold weather provisions.
- B Intellisys® control system**
Intellisys performs accurate matching of machine output to system requirements, thus increasing engine efficiency.
- C Lifting eyes, forklift slots, running gear**
These features provide easy installation and increased maneuverability.
- D 600-hp Cummins QSX-15 engine**
This powerful engine meets current and future emissions requirements.

- E Visual and audible warning system**
The advanced warning system for machine startup increases safety for the operator and others in the vicinity.
- F 110% fluid containment system**
This system offers double-wall protection and keeps fluids from creating environmental hazards.



mentally friendly compressor

MODEL	NHP1500WCU
ENGINE	
Make / Model	Cummins / QSX-15 Tier 3
Number Of Cylinders	6
Cylinder Bore – in (mm)	5.39" (137)
Cylinder Stroke – in (mm)	6.7" (170)
Displacement – cu in (L)	915 (15)
Rated / Idle Speed – rpm	1,800 / 1,200
Bhp @ Rated Speed – bhp (kW)	600 (448)
Fuel / Cooling	Diesel / water
Electrical Volts / CCA	24 / 1,400
Engine Oil Capacity – qt (L)	96 (90.8)
Radiator Coolant Capacity – gal (L)	25.5 (24.1)
Fuel Consumption @ 100% Load – gph (L/hr)	25.6 (24.2)
Fuel Tank Capacity – gal (L)	300 (1136)
Operating Time @ Full Load – hr	11.7
ROTARY SCREW COMPRESSOR	
Number Of Compression Stages	2
Free Air Delivery – cfm (m ³ /min)	1,500 (42.5)
Rated Operating Pressure – psig (bar)	150 (10.3)
Pressure Range – psig (bar)	60 – 150 (4.1 – 10.3)
Air Discharge Outlet Quantity / Size – in (mm)	1 / 3" (76.2)
Lube Oil Capacity – gal (L)	20 (76)
DIMENSIONS WITH WAGON STEER RUNNING GEAR	
Length With / Without Drawbar – in (mm)	287" (7290) / 237" (6020)
Height – in (mm)	98.3" (2497)
Width – in (mm)	77.5" (1969)
Shipping Weight – lb (kg)	19,600 (8889)
DIMENSIONS WITHOUT RUNNING GEAR	
Length – in (mm)	237" (6020)
Width – in (mm)	89.8" (2281)
Height – in (mm)	91.3" (2319)
Shipping Weight – lb (kg)	19,000 (8617)



Our 1500 oil-free compressor has a number of options designed for maximum versatility.

■ **Auto start**

Includes a voltage relay switch connection to allow operators to run the machine at a distance, as well as a pressure detection system that automatically starts the machine if the system pressure drops below a certain level.

■ **Marine-grade battery charger**

NEMA 4-rated charger is fully enclosed and sealed to protect the charger and ensure full battery power. This marine-grade charger is built to last the life of the compressor, even after multiple steam cleanings.

■ **Oil replenishment system**

Maintains sufficient lubrication for the engine and reduces maintenance costs by allowing up to 500 hours of full-load operation between service intervals.



Experience the power of Ingersoll Rand construction equipment and industry-leading support and service. Whatever your job, Ingersoll Rand has the solution — from portable air compressors, light towers, and generators to light compaction equipment, concrete equipment, and compact, heavy, and hydraulic demolition attachments. Running a successful business takes more than powerful equipment. That's why Ingersoll Rand partners with an experienced global dealer network to stand beside you every step of the way.

ingersollrand.com
(877) IR BRAND



Ingersoll Rand compressors are not designed, intended, or approved for breathing air applications. Ingersoll Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service.

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein.

Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand standard terms and conditions of sale for such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll Rand. Designs and specifications are subject to change without notice or obligation.